



SPECIFICATIONS

HOT WATER DISPENSER

SO-3004



Power: 110V, 60 Hz

Heating system: 750 W

Current: 6.8 A

Temperature adjustment: Preadjusted

Hot water temperature: 194°F ~ 205°F

Reservoir capacity: Hot water: 1.1 gallons per hour

Dimensions: L x D x H (inches): 7 3/32" x 9 15/32" x 15 13/32" - 17 11/32" (with fittings)

Weight: 13 lbs

Water inlet diameter: 1/2" threaded

Power cord length: 70"

Material of body: Plastic & metal

Source Omega's advantages

- Triple filtration system (Sediment, softener and charcoal filter) (only if sold separately)
- Water leak detector
- Stainless steel tank
- Conditional warranty of 7 years on cooling components and labour
- Should be installed with a leak detector and pressure regulator adjusted under 60 psi (see the conditions of our warranty on our website)



PARTS


HOT WATER DISPENSER

SO-3004



Parts

1. Front panel
2. Indicator light
3. Indicator light holder
4. Circuit breaker
5. Water leak detector
6. Check Valve
7. Pressure release valve
8. Copper tube
9. Heating element
10. Hot water tank
11. Copper plug
12. Nut
13. Rubber feet
14. Hot water control 203°F
15. Hot water control 212°F
16. Power protector
17. Power cord
18. Frame
19. Capillary

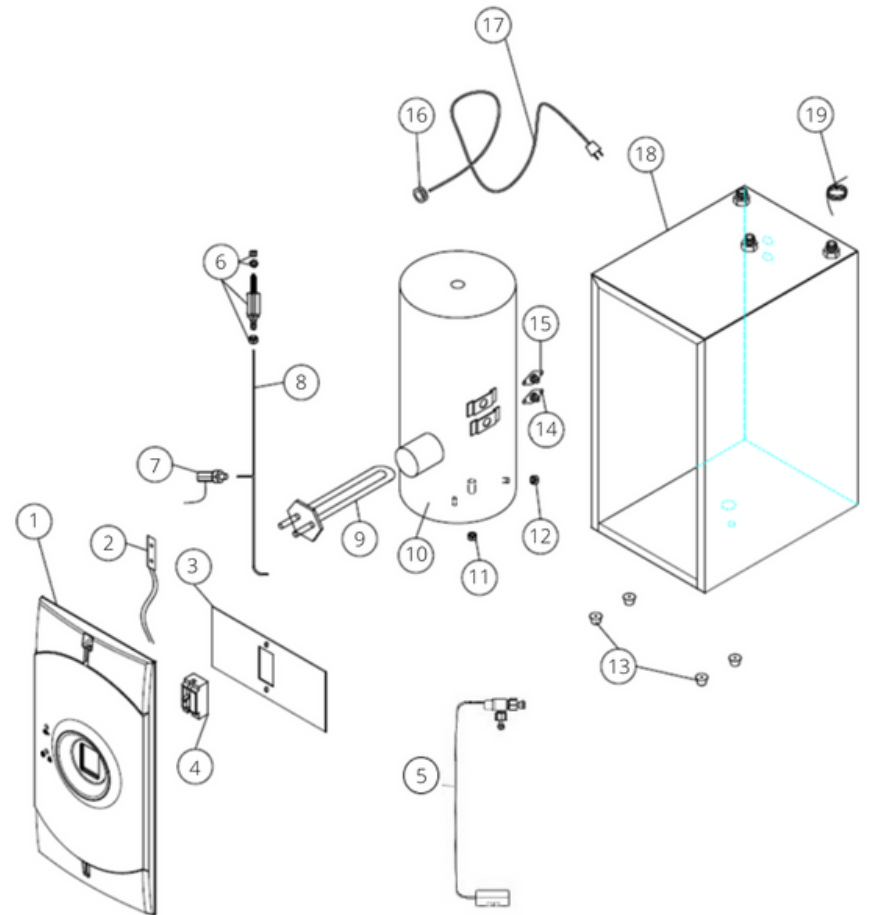



HOT WATER DISPENSER

SO-3004



Hole alignment for faucet

The hole must be 1/2" in diameter.

